

Technical data sheet for

# M1

## Compact Passthrough Dishwasher

W 630mm x D 650mm x H 1530mm



The popular choice in medium volume kitchens where space is limited. Suits economical 600mm bench depth for in-line or corner installation, now supplied with all-plastic 450mm racks.

### Standard Features

- Now with 450mm all plastic racks
- Stainless steel arms with removable end caps for cleaning
- 430mm high wash chamber clearance
- Robust stainless steel construction
- Electromechanical controls
- Auto start on door closure
- Anti-drip door edge channels water away from operator
- Double filtration via scrap trays and separate wash inlet filter
- Adjustable and removeable tilting rack slide
- Full length door springs allow fingertip lifting with tension of 2kg
- 220mm leg clearance for access beneath machines
- Corner or in-line installation
- Watermark certified
- 2.6 litres per cycle water consumption
- Up to 400 plates per hour
- 370W wash pump recirculates wash water at nominal 220 litres per minute through upper and lower wash arms
- 3kW rinse and 2.5kW wash heating
- 2 minute cycle auto-starts on door closure
- Supplied with 450mm all-plastic racks
- Fits 600mm deep bench


### Accessories

- 1 x 450mm Dish Rack
- 1 x 450mm Cup Rack
- 1 x Cutlery Container



**WASHTECH**<sup>®</sup>  
PROFESSIONAL WASH SYSTEMS

The unit shall be a Washtech pass-through dishwasher with Watermark certification, suitable for in-line or corner installation. The unit shall be fitted with automatic fill and low level pump and element protection and automatically start on door closure a two minute complete operating cycle. Door clearance shall be 430mm. The unit shall be fitted with rotating upper and lower all stainless steel separate wash and rinse arms, all with removable end plugs for cleaning. Hot water consumption shall be 2.6 litres per operating cycle. The unit shall require connection to 15amp single phase electrical supply. The unit shall be supplied with 450mm all plastic cup and dishracks and shipped in 100% recyclable packaging. Height of machine shown includes height with maximum 60mm adjustable leg option in use.

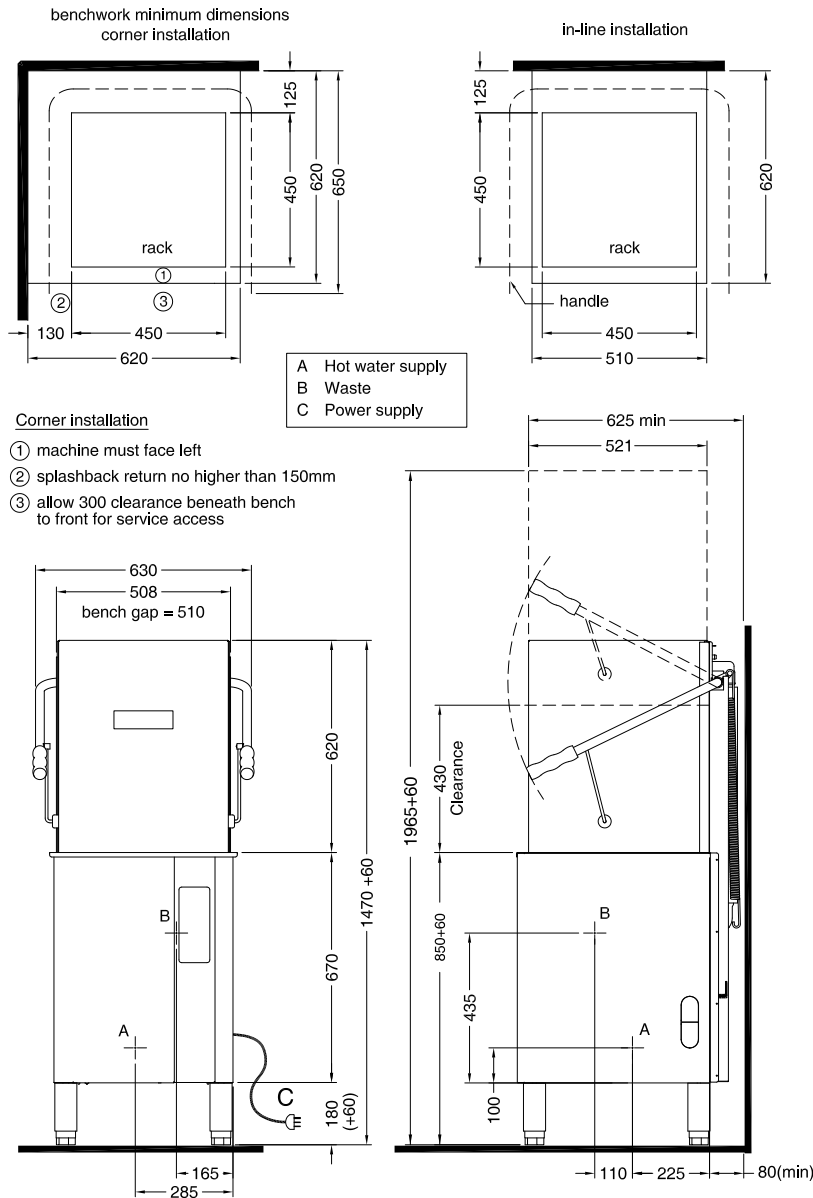

Australia  
[www.moffat.com.au](http://www.moffat.com.au)

New Zealand  
[www.moffat.co.nz](http://www.moffat.co.nz)

Australia  
 Moffat Pty Limited

Victoria/Tasmania  
 740 Springvale Road  
 Mulgrave, Victoria 3170  
 Telephone 03-9518 3888  
 Facsimile 03-9518 3833  
[vsales@moffat.com.au](mailto:vsales@moffat.com.au)  
[www.moffat.com.au](http://www.moffat.com.au)

New South Wales  
 Telephone 02-8833 4111  
[nswsales@moffat.com.au](mailto:nswsales@moffat.com.au)

South Australia  
 Telephone 03-9518 3888  
[vsales@moffat.com.au](mailto:vsales@moffat.com.au)

Queensland  
 Telephone 07-3630 8600  
[qldsales@moffat.com.au](mailto:qldsales@moffat.com.au)

Western Australia  
 Telephone 08-9202 6820  
[bgarcia@moffat.com.au](mailto:bgarcia@moffat.com.au)

New Zealand  
 Moffat Limited  
 Christchurch  
 16 Osborne Street  
 Christchurch 8011  
 Telephone +64 3-389 1007  
 Facsimile +64 3-389 1276  
 Auckland  
 Telephone +64 9-574 3150  
[export@moffat.co.nz](mailto:export@moffat.co.nz)  
[www.moffat.co.nz](http://www.moffat.co.nz)



A	Hot Water	temperature connection pressure flow quality	65C 3/4" 200-350 kPa 20 litres per min potable & soft
B	Waste	connection line	1.5 BSP 2" BSP
C	Electrical	single phase 240V 50Hz	15 amp

Refer operator manual for complete installation instructions.

#### Dimensions

Width	630mm
Depth	650mm
Height	1530mm
Weight	80kg

#### Packed Dimensions

Width	695mm
Depth	750mm
Height	1440mm
Weight	101kg
Cubicmetres	0.77m <sup>3</sup>



© Copyright Moffat Ltd  
 Moffat /1175/8.10

