

Technical data sheet for

ME

Economy Passthrough Dishwasher

W 705mm x D 765mm x H 1530mm



A full size machine with huge 430mm door clearance, for washing very large plates, serving dishes and bowls in 500mm dishracks.

Standard Features

- Stainless steel arms with removable end caps for cleaning
- 430mm high wash chamber clearance
- Robust stainless steel construction
- Electromechanical controls
- Auto start on door closure
- Anti-drip door edge channels water away from operator
- Double filtration via scrap trays and separate wash inlet filter
- Adjustable and removeable tilting rack slide
- Full length door springs allow fingertip lifting with tension of 2kg
- 220mm leg clearance for access beneath machines
- Corner or in-line installation
- Watermark certified
- 2.6 litres per cycle water consumption
- Up to 600 plates per hour
- 750W wash pump recirculates wash water at nominal 350 litres per minute through upper and lower wash arms
- 2.5kW rinse and 2.5kW wash heating
- 2 minute cycle auto-starts on door closure
- L-shaped tank with curved corners
- Suits 500mm international standard racks
- Fits 650mm deep bench for in-line installation - 700mm in corner application


Accessories

- 1 x 500mm Dish Rack
- 1 x 500mm Cup Rack
- 1 x Cutlery Container



WASHTECH[®]
PROFESSIONAL WASH SYSTEMS

The unit shall be a Watermark certified Washtech pass-through dishwasher, suitable for in-line or corner installation. The unit shall be fitted with automatic fill and low level pump and element protection and automatically start on door closure a two minute complete operating cycle. Door clearance shall be 430mm. The unit shall be fitted with rotating upper and lower all stainless steel separate wash and rinse arms, all with removable end plugs for cleaning. Hot water consumption shall be 2.6 litres per operating cycle. The unit shall require 15amp single phase electrical supply. The unit shall be supplied with 500mm all plastic cup and dishracks and shipped in 100% recyclable packaging. Height of machine shown includes height with maximum 60mm adjustable leg option in use.

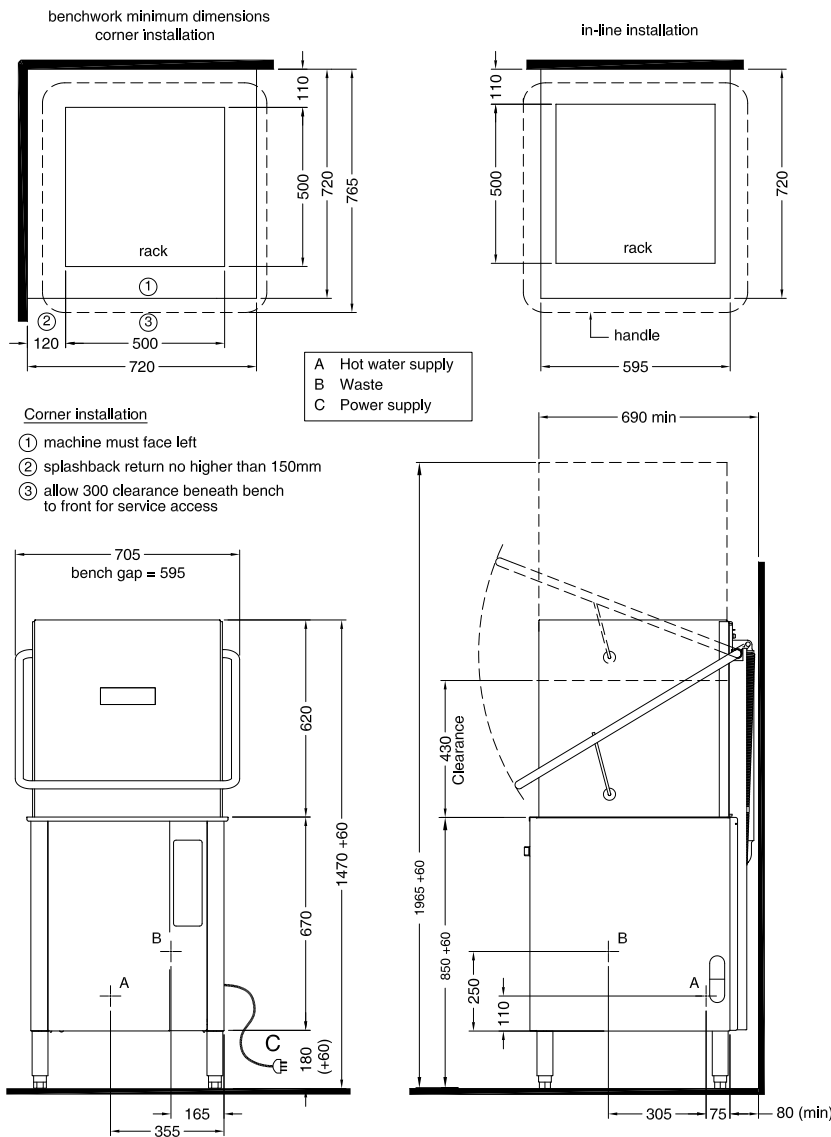

A	Hot Water	temperature connection pressure flow quality	65C 3/4" 200-350 kPa 20 litres per min potable & soft
B	Waste	connection line	1.5 BSP 2" BSP
C	Electrical	single phase 240V 50Hz	15 amp

Refer operator manual for complete installation instructions.

Dimensions

Width	705mm
Depth	765mm
Height	1530mm
Weight	97kg

Packed Dimensions

Width	760mm
Depth	810mm
Height	1450mm
Weight	120kg
Cubicmetres	0.9m ³



Australia
www.moffat.com.au

New Zealand
www.moffat.co.nz

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
bgarcia@moffat.com.au

New Zealand
Moffat Limited
Christchurch
16 Osborne Street
Christchurch 8011
Telephone +64 3-389 1007
Facsimile +64 3-389 1276
Auckland
Telephone +64 9-574 3150
export@moffat.co.nz
www.moffat.co.nz



© Copyright Moffat Ltd
Moffat /1175/8.10

