

Technical data sheet for

UE

Economy Undercounter Dishwasher - 500 Rack

W 600mm x D 650mm x H 850mm




Washtech UE delivers no nonsense undercounter wash performance with 500mm racks.

- Upper and lower stainless steel arms with removable caps for cleaning
 - Flush front design
 - Magnetic door switch
 - Ergonomically positioned OneTouch controls
 - Robust stainless steel construction
 - Electromechanical controls
 - No commissioning required
 - Watermark certified
 - Low water consumption - 2.6 litres per cycle water consumption
 - Up to 600 plates per hour
 - Recirculates wash water at nominal 220 litres per minute
 - 3kW rinse and 2.5kW wash heating
 - 2 minute wash cycle
 - 300mm wash chamber height clearance
 - Suits 500mm international racks
 - 150mm legs to facilitate easy cleaning beneath machine
 - Fits 700mm bench depth
- 1 x 500mm Dish Rack
 - 1 x 500mm Cup Rack
 - 2 x Cutlery Containers



WASHTECH[®]
PROFESSIONAL WASH SYSTEMS

The unit shall be a Washtech undercounter dishwasher with Watermark certification. The dishwasher shall have upper mounted controls with a two minute complete operating cycle. The unit shall be supplied with 500mm cup and dishracks and the wash compartment shall be 300mm tall. The unit shall be fitted with rotating upper and lower all stainless steel wash and rinse arms, all with removable end plugs for cleaning. Hot water consumption shall be 2.6 litres per operating cycle and electrical supply requirement 15 amp single phase. The unit shall be supplied in 100% recyclable shipping packaging.

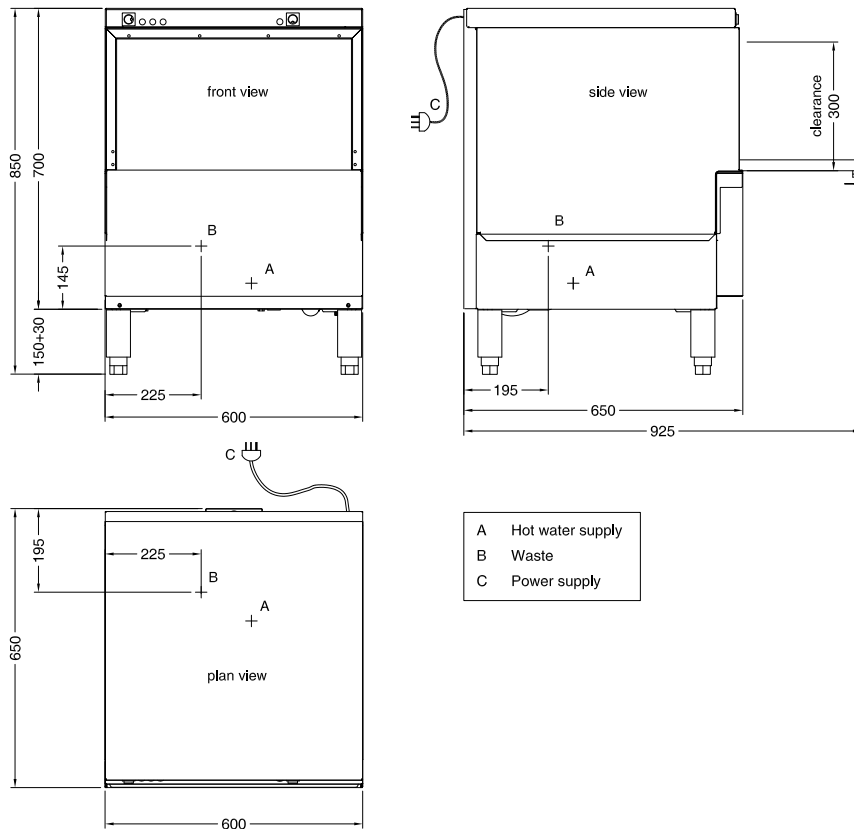

Australia
www.moffat.com.au

New Zealand
www.moffat.co.nz

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
bgarcia@moffat.com.au

New Zealand
Moffat Limited
Christchurch
16 Osborne Street
Christchurch 8011
Telephone +64 3-389 1007
Facsimile +64 3-389 1276
Auckland
Telephone +64 9-574 3150
export@moffat.co.nz
www.moffat.co.nz



A	Hot Water	temperature connection pressure flow quality	65C 3/4" 200-350 kPa 20 litres per min potable & soft
B	Waste	connection line	1.5 BSP 2" BSP
C	Electrical	single phase 240V 50Hz	15 amp
D	Cold Water	cold - otherwise as per hot	

Refer operator manual for complete installation instructions.

Dimensions

Width	600mm
Depth	650mm
Height	850mm
Weight	60kg

Packed Dimensions

Width	720mm
Depth	690mm
Height	850mm
Weight	77kg
Cubicmetres	0.45m ³



© Copyright Moffat Ltd
Moffat /1175/8.10

